



STAINLESS STEEL THREADED ROD WITH ADHESIVE OR EXPANSION ANCHOR (TYP 2 PLACES)

STAINLESS STEEL HEX NUT, FLAT WASHER, LOCK WASHER (TYP 2 PLACES)

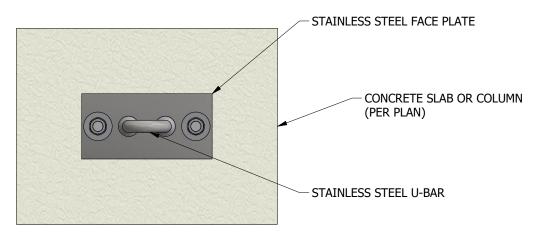

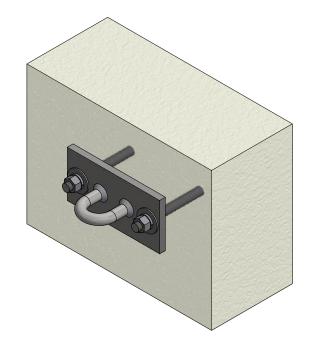

GENERAL MATERIAL SPECIFICATION:

STAINLESS STEEL: TYPE 304 (FY = 30 KSI) SS THREADED ROD: TYPE 304 (FY = 50 KSI)

SERIES NAME: 2 STUD POST-INSTALL WALL ANCHOR (HORIZONTAL U-BAR)

SERIES NUMBER: WA-1001

RATED LOAD: 1,250 LBS FRACTURE LOAD: 5,000 LBS

